



Cafe Barista

O Series

Newco provides a variety of brewers which can change the flavor profile of coffee. Cafe Barista brewing technology controls the three vital aspects of the coffee brewing recipe: water **temperature**, water **volume**, and water contact **time** - extracting the best cup of coffee possible. Cafe Barista opens up a new world of flavor profile control by allowing you to select two different settings. And you can brew into two different size dispensers and/or two different strengths with the same machine. **You** control the **time**, **volume** and **temperature** with the touch of a button. *(no tools needed)*. So Cafe Barista brewers greatly enhance account profitability by allowing two different beverages to be brewed on a single unit while dramatically reducing installation and set up time. Barista Technology, only from Newco, making you successful your way.



* B180-0
dispenser not included



Count Down Timer

Dispenser Options



Corporate Offices
1735 South River Rd
St. Charles MO, 63303
Phone
800.325.7867
636.925.1202
Fax
636.925.0029
Technical Services
800.556.3926
Internet
www.newcocoffee.com



Cafe Barista

O-Series Features

"Brew 1" and **"Brew 2"** selectors provide a choice of two adjustable flavor profiles or portion sizes.

Water Volume: May be adjusted thru the digital display: thirty ounces to one gallon.

Digital Display: Counts down the minutes and seconds remaining until the basket has finished draining. Visa-Brew time may be adjusted.

Water Temperature: May be adjusted between 170 and 210 degrees from the front touch pad.

Pre-infusion: Wets the coffee grounds to de-gas fresh roasted coffee in the basket so that the grounds may be evenly saturated during the brew cycle.

Pulse Brewing: Pulses your chosen water temperature onto the coffee bed for ultimate taste profile accuracy.

Water Filtering Light: Offers service operators an opportunity to communicate added value to customers by indicating that fresh water is being drawn into the tank through the filtration system.

Filter Monitor: Alerts the customer when it is time to change the water filter

Audible Signal: Alerts user when the filter basket has finished draining. Your fresh hot coffee is ready!

Coffee Monitor Light: Indicates the freshness of the last beverage brewed.


Cycle Counter: Monitors the number of brew cycles.

Power Conservation: Allows energy saving during idle time.

Service Light: Indicates the appropriate time for scheduled maintenance and accompanies five "Error" messages when operation is interrupted by a fault.

O-Series

*B180-0 & B350-0

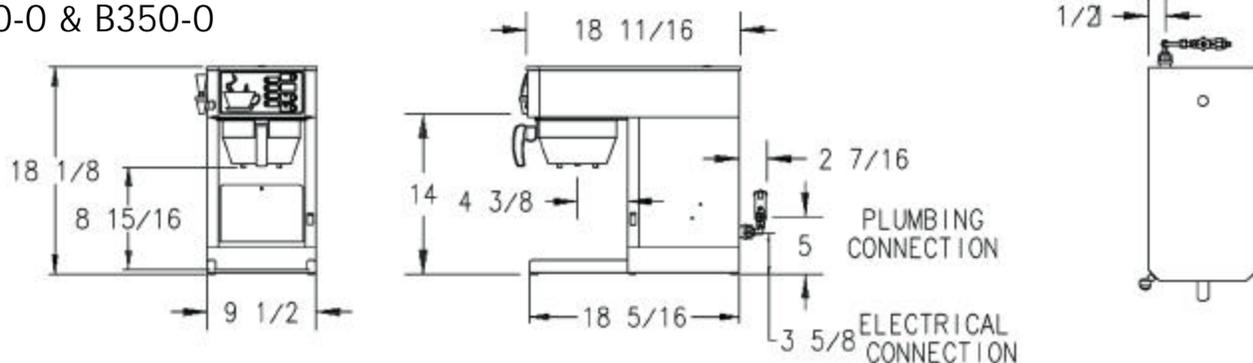

Base Model	Control Option	Part Number	Volts	Amps	Tank* Wattage	Cubic Feet	Ship Weight	Cord Attached
*B-180-0	Barista	*B-180-0	120	15	1800	7.3	32	Yes
B-350-0	Barista	B-350-0	240	14.58	3500	7.3	32	Yes

*Indicates that the brewer is for food service customers only.

Electrical: 120V models are 2 wires plus ground service rated 120V, single phase, 60Hz. 120/240 V models are 3 wires plus ground service rated 120/240 V, single phase, 60Hz

Plumbing: Water line should be 20-90 PSI and have a minimum flow rate of 1.5 GPM. Mechanical connection on brewer is 1/4" male flare connector.

Corporate Offices
1735 South River Rd
St. Charles MO, 63303

Phone
800.325.7867
636.925.1202

Fax
636.925.0029
Technical Services
800.556.3926

Internet
www.newcocooffee.com