



# ACE-LD

## Low Profile BREWING for THERMAL SERVERS

### ACE-LD

Newco designed the ACE series of brewers to satisfy customer requests for a multi-feature specific brewer suited for the office environment. The series is quite versatile and continues to be our top selling line.

ACE models incorporate unique design features that include: a water level detection system that eliminates evaporation short pots, an adjustable brew safety light which flashes during the brew cycle to alert the user the brew cycle is in process, and a gravity hot water faucet system which dispenses hot water while brewing without altering the brew volume.

All the features are built into a stainless steel cabinet for long stability and durability. Newco, making you successful your way.



Dispenser  
not included

### Dispenser Options



# NEWCO



Corporate Offices  
1735 South River Rd  
St. Charles MO, 63303  
**Phone**  
800.325.7867  
636.925.1202  
**Fax**  
636.925.0029  
**Technical Services**  
800.556.3926  
**Internet**  
[www.newcocoffee.com](http://www.newcocoffee.com)

# ACE-LD

Low Profile brewer that fits under most countertop cabinets

Ready light indicates optimum brew temperature achieved

Blinking brew light alerts user that coffee is brewing

Gravity fed Hot Water Faucet for tea and soups

Universal base for perfect dispenser alignment


Tank "ON/OFF" switch

Pulse Brewing Option




The Patel Adapter locks onto either base making it a permanent stand

# 120952

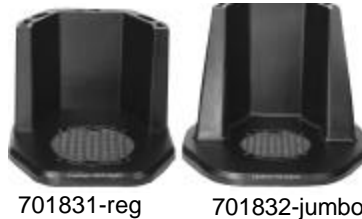

Thermal Dispenser Base Options

## Dimensions

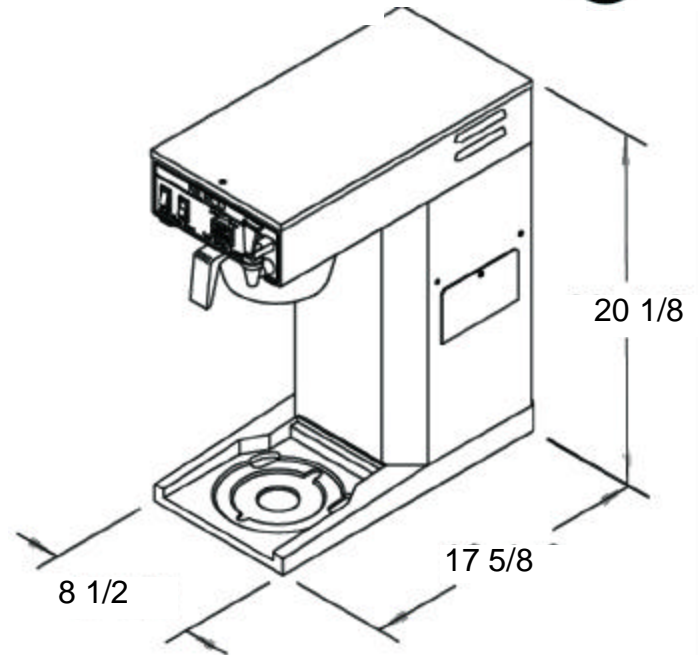

| Base Model | Part Number | Volts | Amps    |         | Tank Wattage |         | Cubic Feet | Ship Weight | Cord Attached |
|------------|-------------|-------|---------|---------|--------------|---------|------------|-------------|---------------|
|            |             |       | USA/Can | USA/Can | USA/Can      | USA/Can |            |             |               |
| Ace TC-blk | 102381-B    | 120   | 11.67   | 11.67   | 1400w        | 1400w   | 5.16       | 23 lbs      | Yes           |
| Ace LD-blk | 102382-B    | 120   | 14.58   | 11.67   | 1750w        | 1400w   | 5.86       | 25 lbs      | Yes           |
| Ace AP-blk | 102768-B    | 120   | 14.58   | 11.67   | 1750w        | 1400w   | 6.33       | 26 lbs      | Yes           |
| Ace D-blk  | 102876-B    | 120   | 14.58   | 11.67   | 1750w        | 1400w   | 7.27       | 27 lbs      | Yes           |
| Ace S-blk  | 102773-B    | 120   | 14.17   | 11.67   | 1700w        | 1400w   | 5.16       | 29 lbs      | Yes           |
| Ace LP-blk | 102774-B    | 120   | 14.17   | 11.67   | 1700w        | 1400w   | 6.68       | 31 lbs      | Yes           |

**Electrical:** 120V models are 2 wires plus ground service rated 120V, single phase, 60Hz. 120/240 V models are 3 wires plus ground service rated 120/240 V, single phase, 60Hz

**Plumbing:** Water line should be 20-90 PSI and have a minimum flow rate of 1.5 GPM. Mechanical connection on brewer is 1/4" male flare connector.

\*Cord not included on 240v models

Corporate Offices  
1735 South River Rd  
St. Charles MO, 63303

Phone  
800.325.7867  
636.925.1202

Fax  
636.925.0029  
Technical Services

Internet  
www.newcocoffee.com